


Quotation

We thank you for your interests in our machines, we are pleased to quote to you without obligation:

Details	Installed price
1) PYGD450A Gathering Machine 2) GALAXY 6000e Perfect Binder+PUR 3) Conveyors and Three knife trimmer Jazz 100e	

GALAXY 6000e Perfect Binding Line

英厚机械 BindEx®

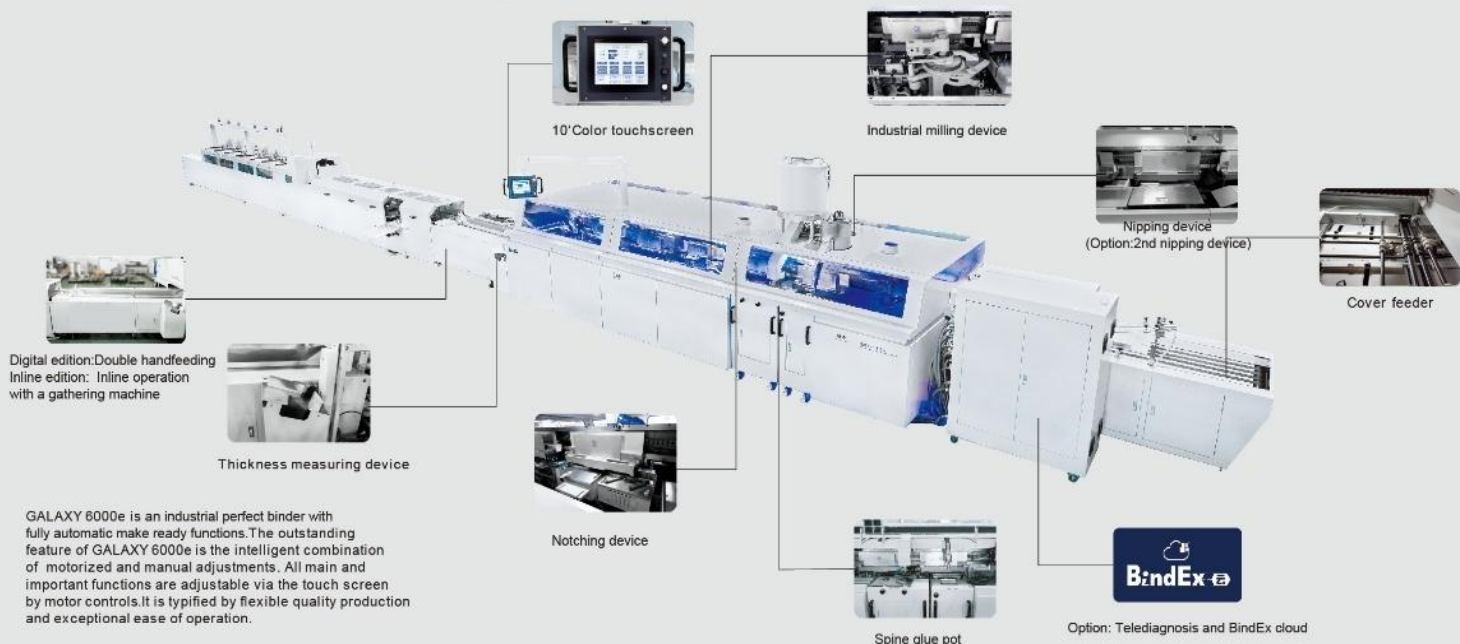

Components of GALAXY 6000e Perfect Binding Line

Name: Perfect Binding Line-PUR

Model: GALAXY6000e (15 collating pockets)

Configuration:

1) PYGD450A Gathering Machine

Components: Hand feeding station

PYGD450A Gathering groups (5 groups)

Linear conveyor

Reversing conveyor

Rejecting device

Collecting table

2) GALAXY 6000e Perfect Binder

Components: Book in feeding channel

GALAXY 6000e perfect binder

Stream cover feeding station

Reversing conveyor

Conveyor/collecting table

3) Conveyors and Three knife trimmer

Components: 60m transport conveyors

LDJ450 book stacking machine

Jazz-100e three knife trimmer

PYGD450A Gathering Machine



Main Technical Features:

- *Hand feeding station: Additional signatures or sheets could be fed
- *Collating machine: **5** groups with **15** pockets, signatures are fed and collated during delivery
- *Rejecting device: Non-stop for ejecting unqualified book blocks
- *Reversing conveyor: Book blocks are transferred from lay-down position to erect position
- *Linear conveyor
- *Collecting table: In Stand-alone mode, the collecting table collects book blocks automatically (criss-cross collecting function available)


Technical Specifications:

Gathering pockets:	9/12/15/18/21/24
Mechanical speed:	(in line with the binder) Max 6000 cycles/ hour
Signature length:	140mm-450mm
Signature width:	130mm-300mm
Power requirement (21 pockets) :	3 phase, 380V, 50Hz, 12.9Kw
Net weight (21 pockets) :	5600kg
Dimensions (21pockets) :	21300mm×1200mm×1300mm
Weight of each collating group:	700Kg
Length of each collating group:	2140mm

Galaxy 6000e Perfect Binder**Main Technical Features:**

- *Heavy-duty industrial frame (cast iron) and clamp transport system to ensure professional and quality book production
- *Easy to use thanks to interactive user interface via touch screen
- *Fully motorized adjustments of all important functions for setting block thickness and cover format
- *13 heavy-duty coated clamps
- *Infeed channel with adjustable jogger
- *Flexible spine preparation station with powerful main milling motor and separate frequency control motor with notching, milling depth adjustable via touch screen
- *Professional spine-glue with double-rollers, separate side glue unit, with automatic glue cut-offs
- *Stream cover feeder for automatic adjustments of scoring lines according to book thickness
- *Heavy-duty nipping station with automatic adjustments for book thickness, 2nd nipping station as option
- *Optimized delivery channel with automatic adjustments according to book thickness
- *Option: telediagnosis function, possible to connect with BindEx cloud platform to monitor real-time machine performance and to connect digital workflow.

Technical Specifications:

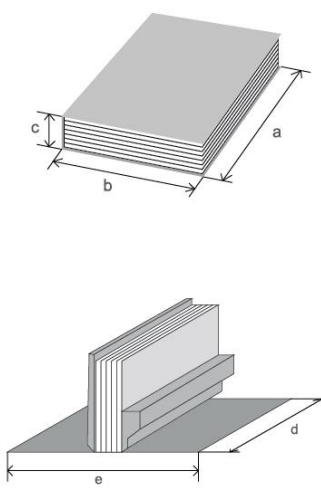Mechanical Speed	6000 cycle/hour	
Clamps	13	
Length of Book	140mm - 450mm	
Width of Book	110mm - 300mm	
Length of Cover	140mm-450mm	
Width of Cover	223mm-635mm	
Spine Thickness	3-50mm	
Power Requirement	380V, 50HZ, 36kw	
Net Weight	6000Kg	
Overall Dimensions(L*W*H)	9500×2000×2200mm	

Conveyors and Three knife trimmer

LDJ450 Stacking Machine**Main Technical Features:**

- ❖ No. of Books to be stacked is set via touch screen according to the cutting height of the three knife trimmer

Technical Specifications:

Mechanical speed	70 (c.p.m.Noncounter heap mode)
Stacking size	Max. 450mm×320 (mm) Min. 110mm×80 (mm)
Max. Stacking height	≤100mm
Power requirement	2 phase, 220V, 50Hz, 1.5kw
Air requirement	23L/min
Net weight	380Kg
Overall Dimensions(L*W*H)	1500×760×1330 (mm)

JAZZ 100e three knife trimmer:



Main Technical Features:

- *Stand-alone Machine that could be connected to the perfect binding line
- *Automatic process of belt feeding, position fixing, clamping, pushing, trimming and collecting
- *Integral casting and strong rigidity, ensuring high trimming accuracy
- *Cutting lubrication device ensure the smooth cutting
- *PLC control and stepless-speed control
- *Totally enclosed machine, safe and low noise
- *Automatic make ready on three positions: 1:side knife; 2:pressing unit; 3:book pushing unit

Technical Specifications:

Mechanical Speed	15-50 cuts/min
Max. Untrimmed Size	410mm×310mm
Finished Size	Max. 400mm×300mm Min. 110mm×90mm
Max Cutting Height	100mm
Min Cutting Height	3mm
Power Requirement	3 phase, 380V, 50Hz, 6.1Kw
Air Requirement	0.6Mpa, 970L/min
Net Weight	4500Kg
Overall Dimensions(L*W*H)	3600×2430×1750mm

Price Validity: 3 month

Packing: Included

The type of the packing is wooden bottom/sheeting and / or seaworthy (box/container) packing. Confirm with ISPM 15.

Installation and Training:

It will be made by 3 technician for a period of 10 days

Delivery Time: 4 months after receiving down payment , ready at BindEx factory

Further Regulations:

Any changes or supplements to this contract must be made in writing; this also applies to the cancelation of the requirement for written form.

No additional oral agreements exist for this contract. Only the description of the scope of supply and services cited in this contract and other agreements set forth in this contract are binding-any other agreements which may have been reached previously are expressly nullified, insofar as such agreement are not included in this contract.

Guarantee:

24 Months on parts and serious faults starting with initial operation and commercial use of the machine, but latest starting 30days after delivery .